



TECHNICAL DATA SHEET

StepliteX StormGrip O4 blue/orange

General information

Size range	
• EU	36 - 49
• UK	3.5 - 15
• US	4 - 16
The testresults in this technical datasheet are performed on size EU 42, UK 8, US 9	
Weight / pair	
• Safety level: Non-safety	± 1 930 g
Colours	
	
navy blue - oranje/blauw	

Upper


A. Dimensions	
• Height	outer measure: 36.0 - 39.0 cm
	cutting edge: 26.5 - 29.0 cm
• Foot length	outer measure: 30.0 cm
	inner measure: 28.0 cm
B. Thickness	
• Upper edge	2.6 - 3.1 mm
• Calf	2.8 - 3.4 mm
• Shinbone	2.8 - 3.6 mm
• Ankle	4.2 - 5.3 mm
• Heel	5.6 - 6.0 mm
C. Raw material	
	NEOTANE (proprietary polyurethane compound)
D. Density	
	0.65 - 0.70 g/mL

E. Tensile strength		
(incl. lining)	10 ± 2 N/mm ²	
F. Elongation		
(incl. lining)	600 +/- 100%	
G. Hardness		
	43 +/- 2 Sh A	
H. Tear strength		
(incl. lining) N/mm	10.0 ± 2.0 N/mm	
I. Aging		
(incl. lining)	7 days at 70 °C	14 days at 70 °C
• Tensile strength	11.6 MPa	9.0 MPa
• Elongation	580 ± 20%	600 ± 20%
• Tear strength	11.4 N/mm	9.0 N/mm
J. Chemical resistance		
	see detailed list	
K. Environmental temperature		
• Maximum	± 100 °C	
• Minimum	Cold insulation down to -40 °C	

Lining

A. Material	
	PU coating on polyester fabric
B. Seams	
	Welded and knitted seams

Outsole profile

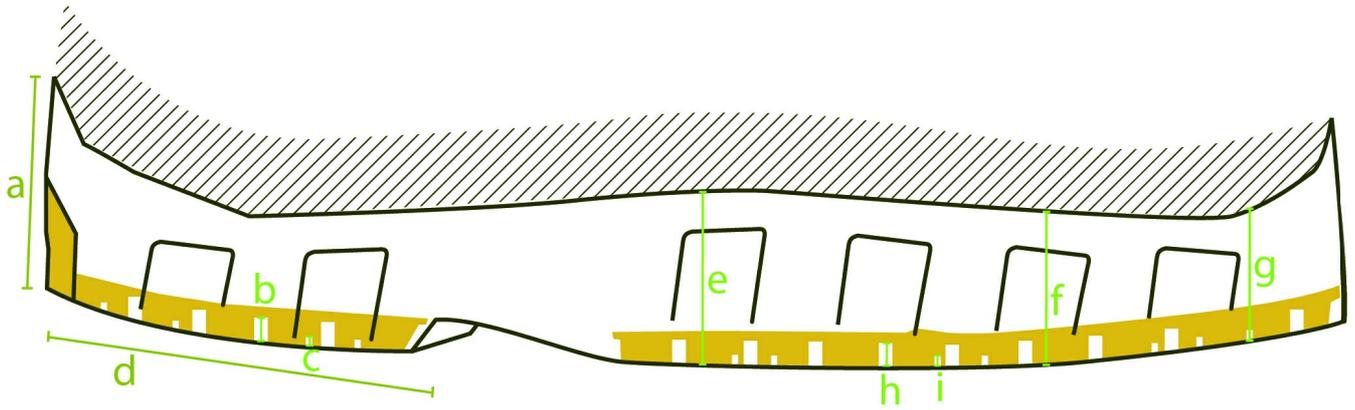

A. Dimensions

• Heel

• Thickness	(a)	50.0 mm
• Profile depth	(b)	6.0 mm
	(c)	2.0 mm
• Length	(d)	102.0 mm
• Width		82.0 mm

• Outsole

• Thickness	(e)	40.0 mm
	(f)	34.0 mm
	(g)	24.0 mm
• Profile depth	(h)	6.0 mm
	(i)	2.0 mm

B. Raw material

Rubber

C. Density

1.1 g/mL

D. Mechanical characteristics

See upper (E)-(F)-(H)

E. Energy absorption of the seat region

30-40 J (requirement ≥ 20 J)

F. Antistatic

dry: $1 \times 10^8 - 1 \times 10^9$ Ohm

wet: $1 \times 10^7 - 1 \times 10^9$ Ohm

G. Abrasion resistance

85 mm³

H. Hardness	
	60 +/- 10 Sh A
I. Footwear slip resistance	
	SRC
J. Chemical resistance	
	see detailed list

Certificates

CE	EN ISO 20347:2012 2005114-02-86
-----------	------------------------------------

Accessories

Thermo-moulded footbed		
Two layers		
• Toplayer	woven textile	
• Colour	black	
• Thickness	0.70 mm	
• Bottom	PU foam	
• Colour	black	
• Thickness	3.0 - 7.0 mm	
Washable at 30°C		